

# ECOLOGY

## IP65 DISTRIBUTION BOXES

Description: IP65 SURFACE BOX 1x12 MOD. (TW). POLYCARBONATE

Reference:  
**CDP12PT**

### Characteristics:

Product type:	Polycarbonate watertight distribution boxes (Sealable)
Exterior dimensions (Height x Width x Depth):	246x310x148 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	1x12 DIN rail
Installation:	Surface
Color:	Grey RAL 7035
Window:	Transparent tinted window
Weight (Kg):	1,51
Cable entry:	Top: 6xM20 - 2xM25 - 2xM32 - 1xM40. Bottom: 6xM20 - 2xM25 - 2xM32 - 1xM40. Int.: 4xM25. Oblong rear: 2xOB 25/32/25
Components:	-
Materials:	Halogen-free plastic materials. Frame and base: polycarbonate. Transparent window: UV protection polycarbonate

### Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	650 °C
Ball pressure test:	70 °C
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC / 1500 V DC
Double insulation:	Class II

### Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 62208 and IEC 62208
Certificates:	



### Codes:


EAN:	8431044129754
Customs tariff number:	85.38.10.00
ETIM 6.0:	EC001892

# ECOLOGY

## IP65 DISTRIBUTION BOXES


Description: IP65 SURFACE BOX 1x12 MOD. (TW). POLYCARBONATE

Reference: CDP12PT

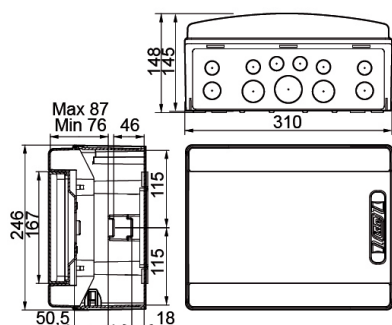

### Detailed drawing:

 <http://www.ide.es/downloads/planos/pdf/CDP12PT.pdf>

 <http://www.ide.es/downloads/planos/dxf/CDP12PT.dxf>

 <http://www.ide.es/downloads/planos/stp/CDP12PT.stp>

### Exterior dimensions (Height x Width x Depth):

246x310x148 mm

### Dimensions of the flush-fit gap (Height x Width x Depth):

-

### Sustainability:

RoHS - REACH

### Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 5

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.